



ZTE Axon Teardown

The whole teardown video of the ZTE new flagship phone AXON.


Written By: Alex Lin



INTRODUCTION


A video step teardown of the ZTE Axon.

Step 1 — ZTE Axon Teardown

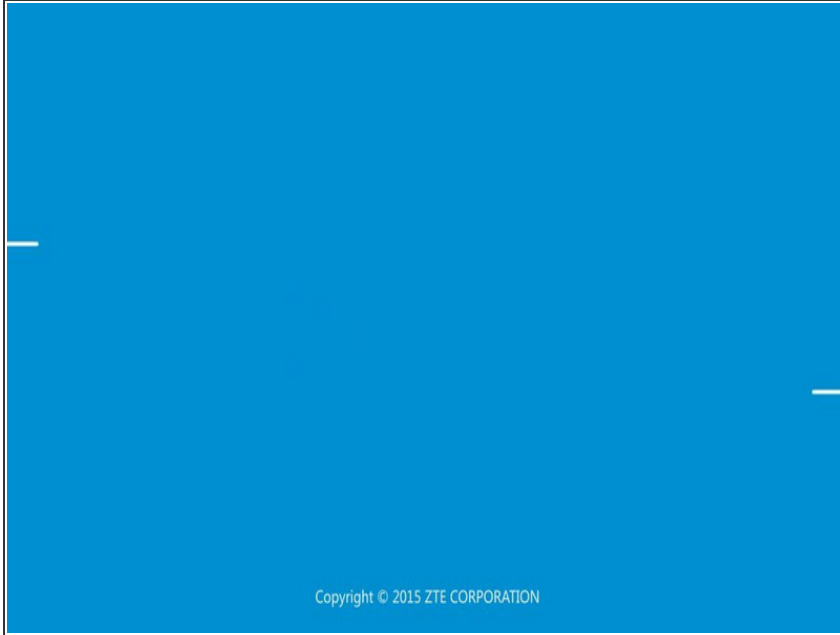

- Remove the card tray, upper and lower back covers.

Step 2

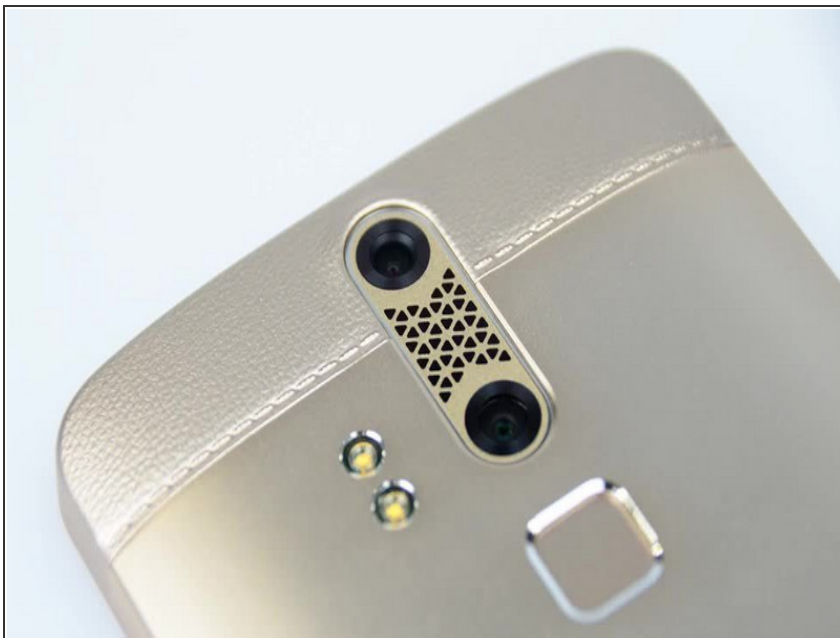


- The back covers and screw locations.

Step 3



- Remove the screws securing the back housing assembly.

Step 4

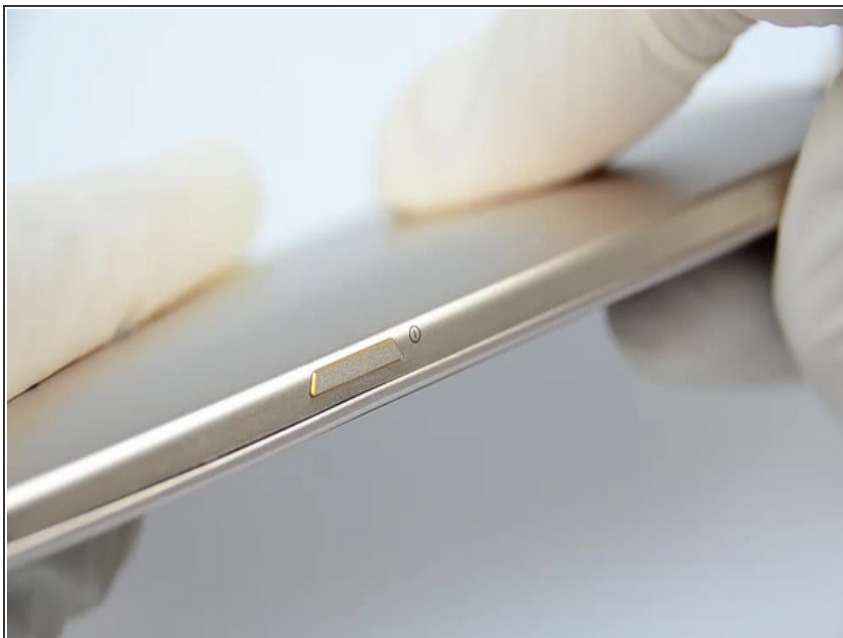

- Open the back housing assembly.

Step 5




- Remove the back housing assembly.

Step 6



- Remove the fingerprint sensor and flash sub-board.

Step 7

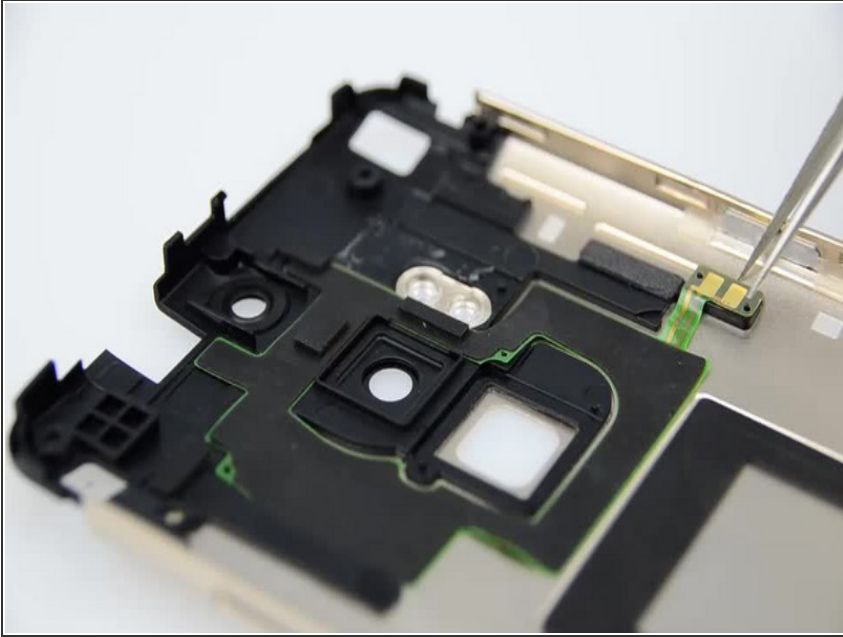

- Remove the NFC sensor.

Step 8



- Remove the speaker box.

Step 9



- Free the front camera and disconnect the connectors.

Step 10



- Free the RF cable and remove the screws securing the mainboard.

Step 11



- Remove the mainboard. The CPU, RAM and ROM of AXON.

Step 12



- Remove the earpiece speaker, back camera and vibrator unit.

Step 13



- Remove the battery.

Step 14



- The heat pipe radiator. Remove the sub-board.

Step 15



- Composing of AXON, part 1.

Step 16



- Composing of AXON, part 2. The end.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-17 08:52:56 AM.